

TAO16.PD

caratteristiche/features




peso/weight



rotazione/rotation



prestazioni/performance

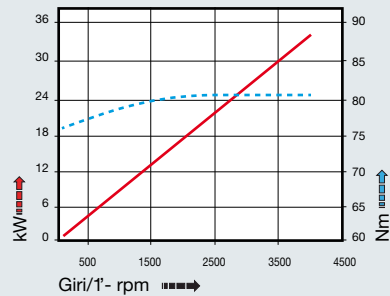

CONO SHANK	size	A	B	H	
				standard	optional
DIN69871 *	-	-	-	-	-
	45	-	-	-	-
	50	223,5	35	80	110
ANSIB5.50 *	-	-	-	65	-
	50	-	-	80	110
BT *	-	-	-	65	-
	50	231,5	45	80	110
HSK	-	-	-	-	-
DIN69893	80	232,5	46	80	110
	100	-	-	-	-
CAPTO	-	-	-	-	-
ISO26623	-	227,5	-	-	-
	C8	-	-	80	110
KM	-	-	-	-	-
	80	223,5	-	80	110
	100	-	-	-	-
DIN2080	-	-	-	-	-
	-	-	-	-	-
	-	-	-	-	-
	-	-	-	-	-
NMTB	-	-	-	-	-
ANSIB5.18	-	-	-	-	-
	-	-	-	-	-

tipi mandrino disponibili / available spindle types

- 2** Albero portafresa Milling shaft
3 Weldon Whistle-Notch
4 DIN69893-HSK

Ø16-Ø22-Ø27

Ø16

HSK40

