




DU20E.150



Feed Avanzamento	balls screw $\varnothing 16 \times 5$ vite a sfere $\varnothing 16 \times 5$
Stroke Corsa	150 mm 150 mm
Drilling Capacity Capacità di foratura	$\varnothing 18$ on steel Rm60 $\varnothing 18$ su acciaio Rm60
Thrust at 6 bar Spinta a 6 bar	4000 N 407 Kg
Spindle speed Velocità mandrino	from 100 to 4500 rpm da 100 a 4500 g/1'
Motor Power Potenza Motore	from 0.75 to 3.00 Kw da 0.75 a 3.00 Kw

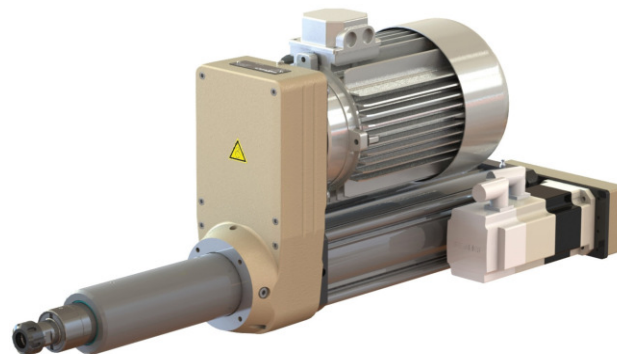

- Advance by ball screw $\varnothing 16 \times 5$, preloaded nut to "0" back lash.
- Spindle concentricity 0,01.
- N. 3 limit switches (1): front, rear and "0" position.
- Work stroke 140mm.
- Feed servomotor not included (2).
- Servomotor predisposition (3).
- Servomotor-ball screw transmission (4) by thooosed belt HTD, ratio 1:1 or 1:2.
- Servomotor torque:
ratio 1:1 max 4,0N/m
ratio 1:2 max 2,0N/m
- Standard color: Beige RAL 1001.
Other colors on request.
- Weight from 44 to 59 Kg



- Avanzamento con vite a ricircolo di sfere $\varnothing 16 \times 5$, chiocciola precaricata a gioco "0".
- Concentricità mandrino 0,01.
- N. 3 sensori magnetici (1): fine corsa posizione "0", fine corsa avanti, fine corsa indietro.
- Corsa utile 140mm.
- Servomotore avanzamento non fornito (2).
- Predisposizione per servomotore (3).
- Trasmissione servomotore-vite (4) con cinghia HTD, rapporto 1:1 o 1:2.
- Coppia servomotore:
rapporto 1:1 max 4,0N/m
rapporto 1:2 max 2,0N/m
- Colore standard: Beige RAL 1001.
Altri colori su richiesta.
- Peso da 44 a 59 Kg

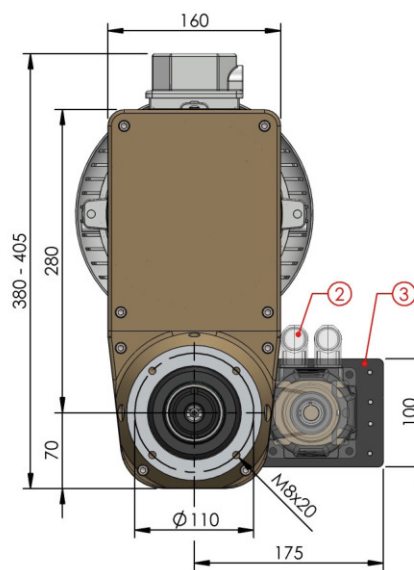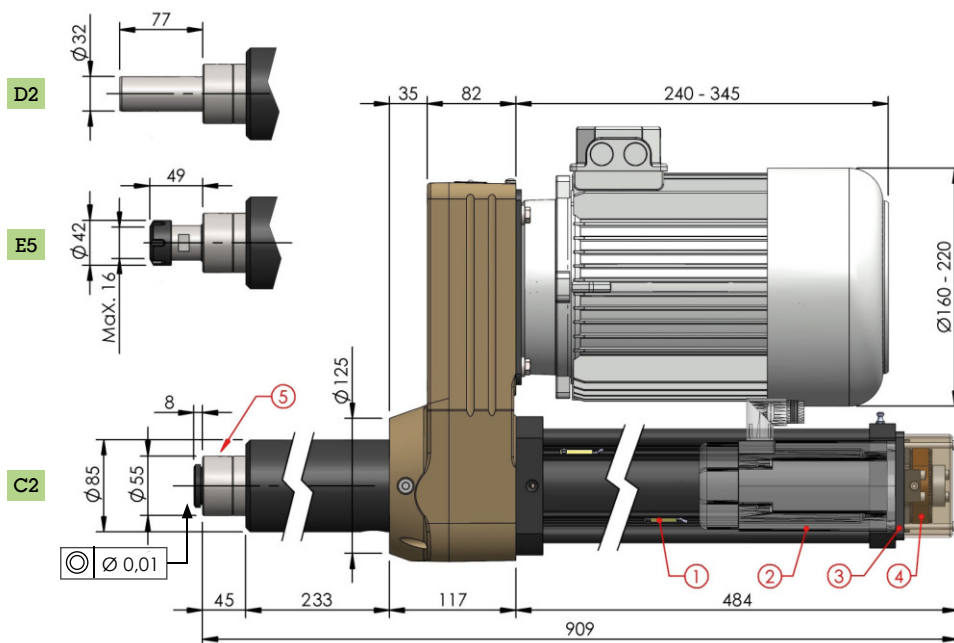

DU20E		150					
stroke / corsa							
	spindle / mandrino		rpm			motor / motore	motor type / tipo motore
			50Hz	60Hz			
C2	MT2 DIN 228	01	100	120	80...	motor reducer 0,75Kw 4 poles	S 230-400V-50/60Hz
E5	ER25 DIN 6499	02	200	240	81...	motor reducer 1,50Kw 4 poles	A brake motor autofrenante
D2	ø20 DIN 55058	03	300	360	076	90 B14 0,75Kw 6 poles	V forced ventilation servoventilato
		05	500	600	116	90 B14 1,10Kw 6 poles	AV brake motor + forced ventilation autofrenante + servoventilato
		07	700	840	156	100 B14 1,50Kw 6 poles	
		08	800	960	226	112 B14 2,20Kw 6 poles	
		11	1100	1320	074	80 B14 0,75Kw 4 poles	
		15	1500	1800	114	90 B14 1,10Kw 4 poles	
		22	2200	2640	154	90 B14 1,50Kw 4 poles	
		30	3000	3600	224	100 B14 2,20Kw 4 poles	
		45	4500	5400	304	100 B14 3,00Kw 4 poles	
					072	80 B14 0,75Kw 2 poles	
					112	80 B14 1,10Kw 2 poles	
					152	90 B14 1,50Kw 2 poles	
					222	90 B14 2,20Kw 2 poles	
					302	100 B14 3,00Kw 2 poles	

STANDARD COLOR

RAL 1001






OPTIONAL COLORS

RAL 1013	RAL 3028
RAL 1023	RAL 5015
RAL 2003	RAL 6018

optional :

accessories for easy installation

accessori per una facile installazione



multispindle head
teste multiple