

MO10

caratteristiche/features


ER20



10 bar



1-6



22000

peso/weight


3,7 kg



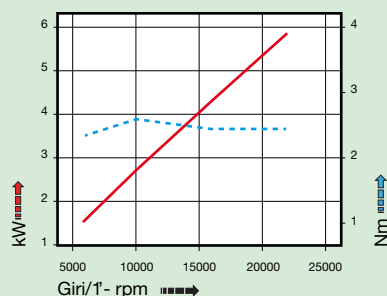
6,5 kg

rotazione/rotation

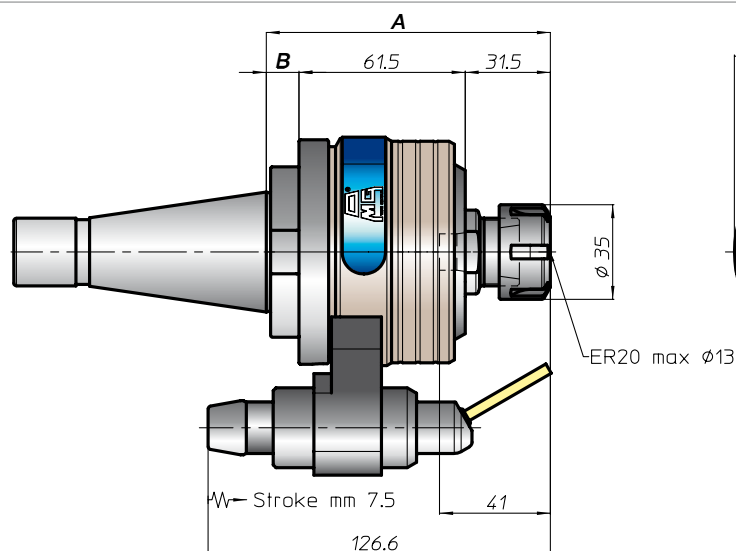
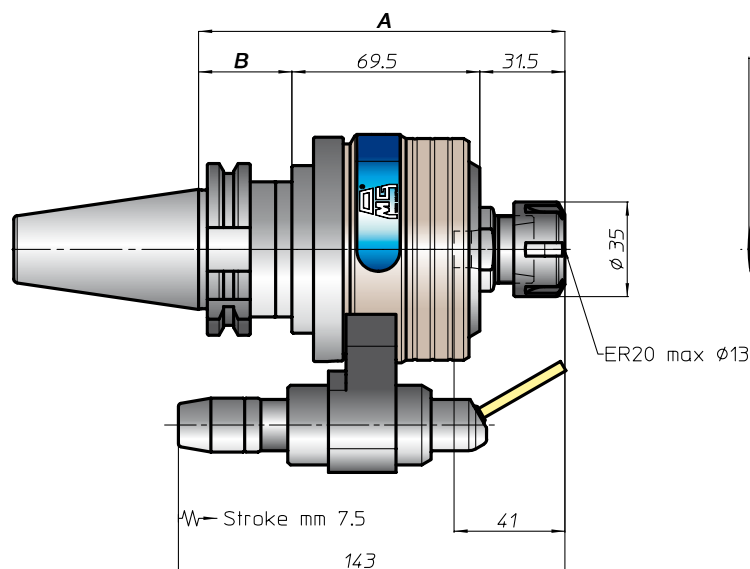

input



output

prestazioni/performance


CONO SHANK		size	A	B	H	
					standard	optional
 DIN9871	30	135,5	35	65	-	
	40			42		80
	45		35			
	50			42		80
 ANSIB5.50	40		139,5		50	
	50			80		
 BT	40		139,5	50	65	-
	50				80	
 DIN9893	63	140,5	42	65	-	
	80	144,5		80		
	100		51	80		
 CAPTO	C5	139,5	-	65	-	
	C6			80		
	C8			80		
 KM	63	135,5	-	65	-	
	80			80		
	100			80		
 DIN2080	40	101	12	65	-	
	50	104,5	15	80		
 ANSIB5.18	40	101	12	65	-	
	50	104,5	15	80		



FH

BAH

TA.CP

TA

MO

HT

VH

TSI/TSX

T

MT-TC-TC3

Accessori
Accessories

Appendice tecnica
Technical supplement

5-3