

MO13

caratteristiche/features



ER25



10 bar



1-6



15000

peso/weight



5 kg



7,5 kg

rotazione/rotation






input



output

prestazioni/performance

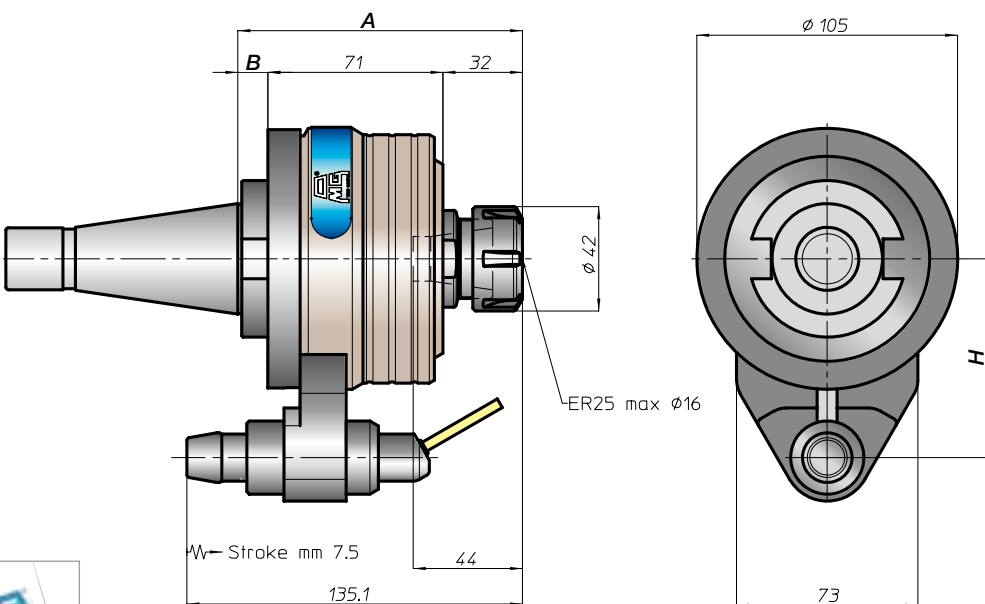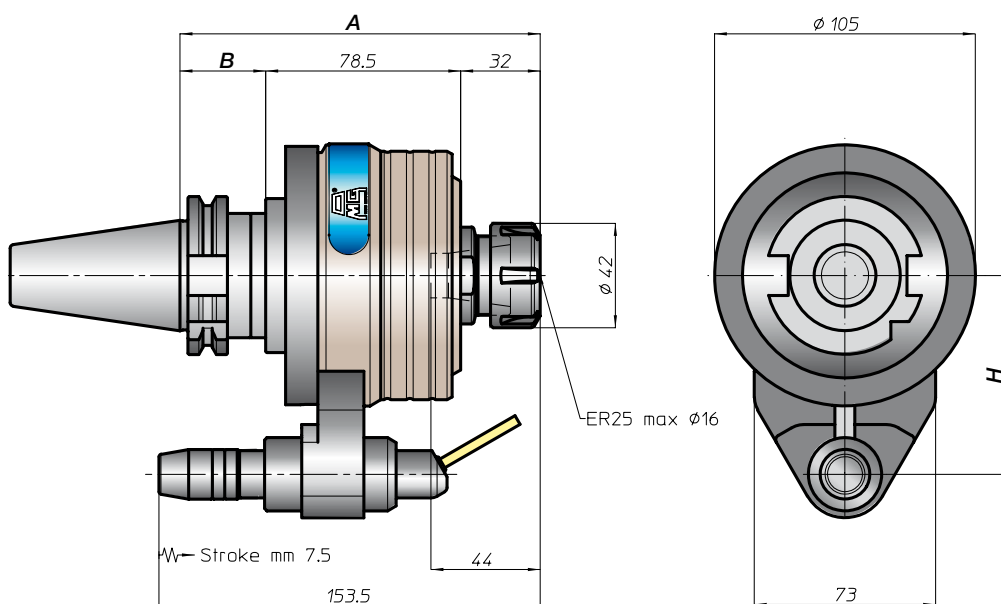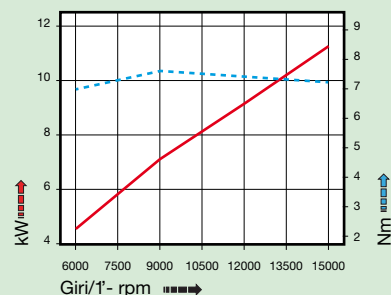

CONO SHANK	size	H			
		A	B	standard	optional
DIN9871	40	143	35	80	-
	45		42		
	50		42	80	-
ANSIB5.50	40	151	35	80	-
	50		42		
BT	40	151	35	80	-
	50		50		
HSK	63	156	42	80	-
	80				
	100				
CAPTO	C5	151	-	80	-
	C6				
	C8				
KM	63	147	-	80	-
	80				
	100				
DIN2080	40	112,5	11,5	80	-
	50	116	15		
ANSIB5.18	40	112,5	11,5	80	-
	50	116	15		