

MO16

caratteristiche/features



ER32



10 bar



1-6



12000

peso/weight



9 kg



10 kg

rotazione/rotation




input





output

prestazioni/performance

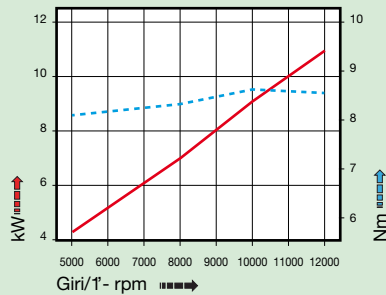

CONO SHANK	size	A	B	H	
				standard	optional
 DIN9871	45		35		
	50	158,5	42	80	-
 CAT	50		35	80	-
	50	164,5	50	80	-
 BT	50	164,5	50	80	-
	80	165,5	42	80	-
 HSK	80	165,5	42	80	-
	100		55		
 CAPTO	C6	164,5	-	80	-
	C8				
 KM	80	160,5	-	80	-
	100				
 DIN2080	40	128	11,5	80	-
	50	131,5	20		
 NMTB	40	128	11,5	80	-
	50	131,5	20		

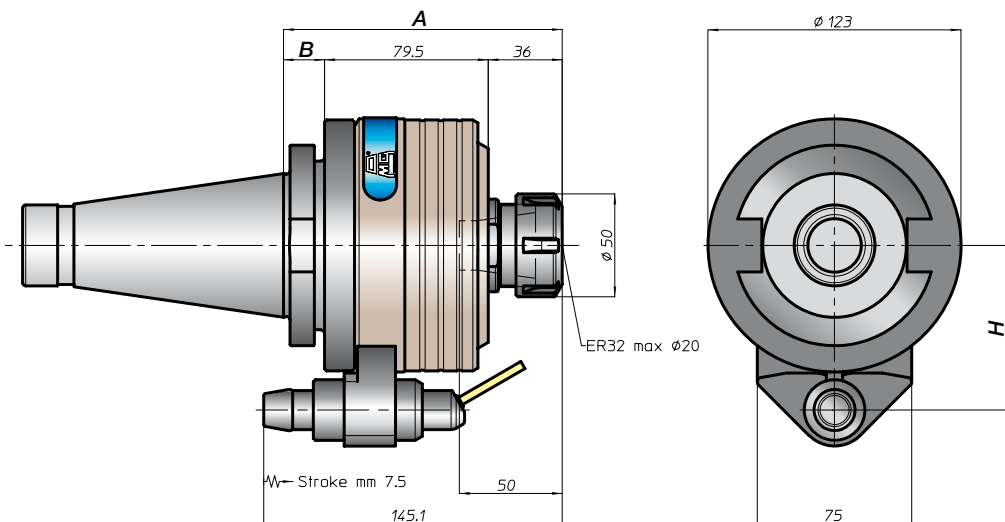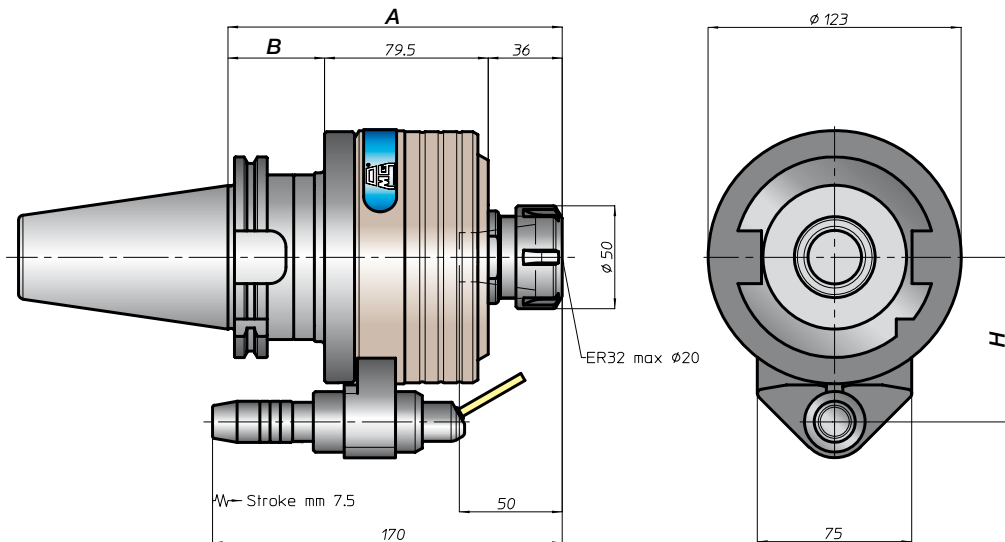

FH

BAH

TA.CP

TA

MO

HT

VH

TSI/TSX

T

MT-TC-TC3

Accessori
Accessories

Appendice tecnica
Technical supplement

5-5