

MOX13

caratteristiche/features



ER25



10 bar



1-6



20000



optional

70 bar

peso/weight



6,5 kg



9 kg

rotazione/rotation






input



output

prestazioni/performance

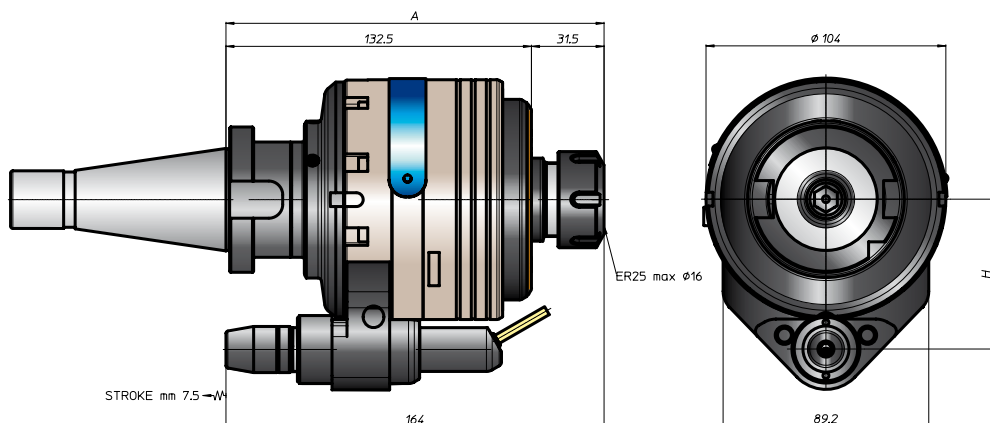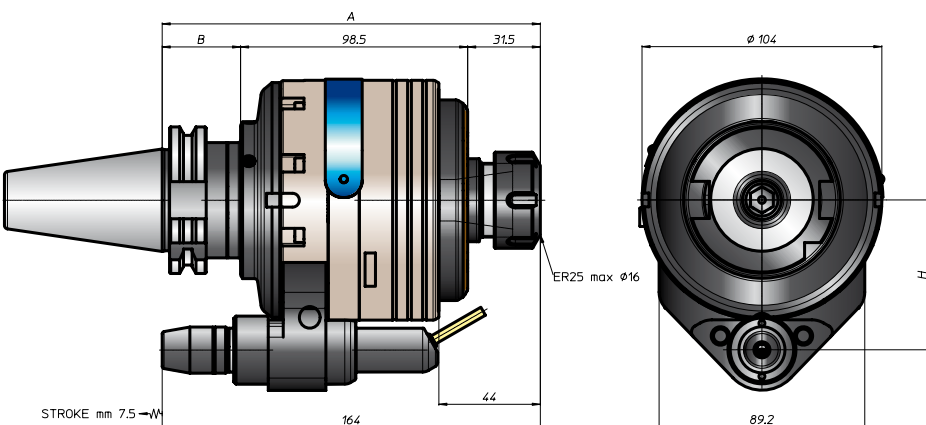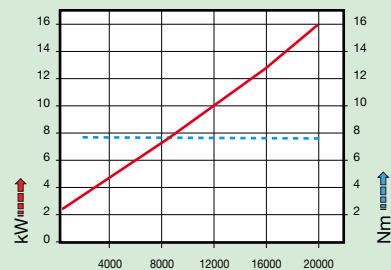

CONO SHANK	size	A	B	H	
				standard	optional
 DIN9871	40	164	34	65	80 110
	45		42	80	110
	50				
 ANSIB5.50	40	164	34	65	80 110
	50		42	80	110
 BT	40		172	35	65
	50	50		80	80
 DING9893	63	173	42	65	80 110
	80	175		80	110
	100		51		
 ISO26623	C5	172	-	65	80 110
	C6			80	110
	C8				
 KM	63	168	-	65	80 110
	80			80	110
	100				
 DIN2080	40	164	34	65	80 110
	50		42	80	110
 ANSIB5.18	40	164	34	65	80 110
	50		42	80	110