



MOX16

caratteristiche/features




peso/weight





rotazione/rotation



prestazioni/performance

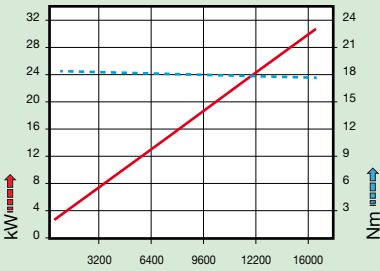

CONO SHANK	size	A	B	H	
				standard	optional
DIN9871	40	172,5	34	80	110
	50		42		
CAT	50	180,5	35	80	110
BT	50		50		
HSK	80	184,5	42	80	110
	100		51		
CAPTO	C6	180,5	-	80	110
	C8				
KM	80	176,5	-	80	110
	100				
DIN2080	40	172,5	34	80	110
	50		42		
NMTB	40	172,5	34	80	110
	50		42		

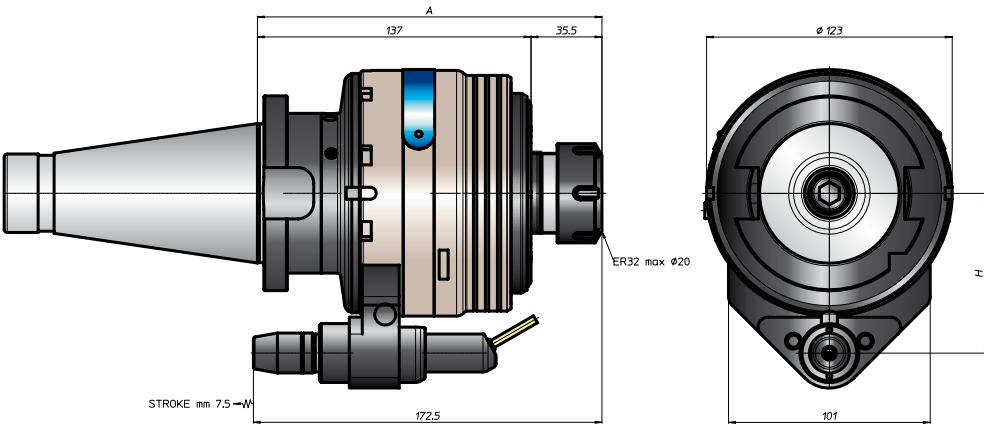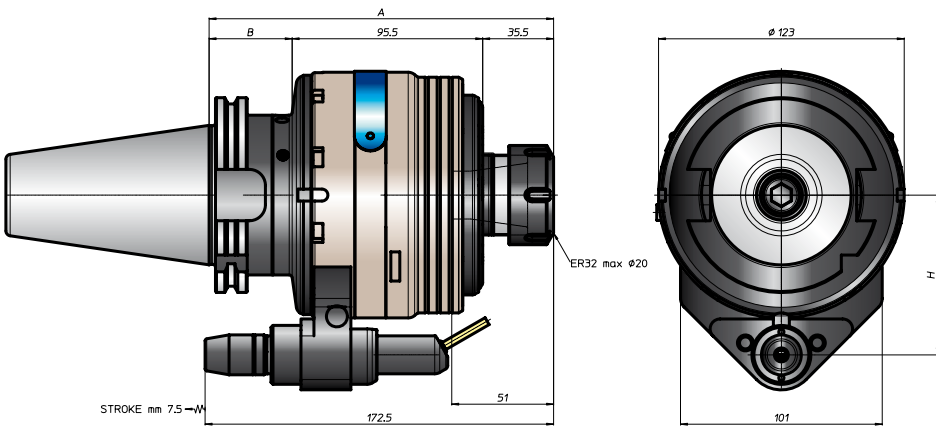

FH

BAH

TA.CP

TA

MO

HT

VH

TSI/TSX

T

MT-TC-TC3

Accessori
Accessories

Appendice tecnica
Technical supplement