

# TA26.PT



## caratteristiche/features




## peso/weight



## rotazione/rotation







## prestazioni/performance

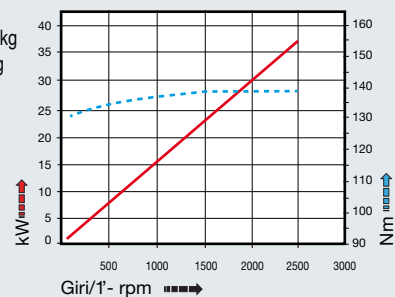

## tipi mandrino disponibili / available spindle types

|                                                        |                                  |                       |                             |                                |
|--------------------------------------------------------|----------------------------------|-----------------------|-----------------------------|--------------------------------|
| <b>2</b> Albero portafrese<br>Milling shaft            | <b>3</b> Weldon<br>Whistle-Notch | <b>4</b> DIN69893-HSK | <b>5</b> COROMANT<br>CAPTO® | <b>6</b> ABS<br>Licenza KOMET® |
| $\varnothing 16$ - $\varnothing 27$ - $\varnothing 32$ | $\varnothing 32$                 | HSK63                 | C4                          | ABS50                          |

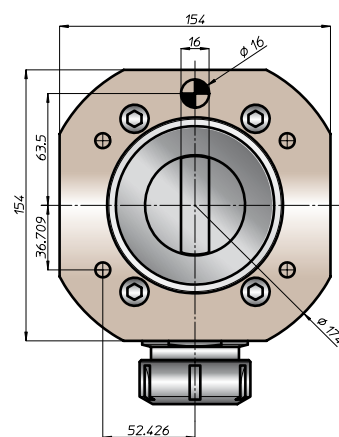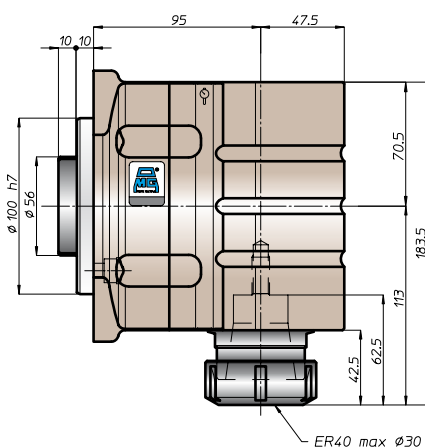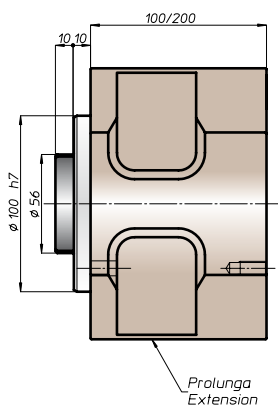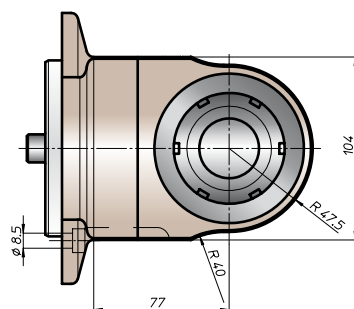

## esempio di collegamento - *connection example*

